





























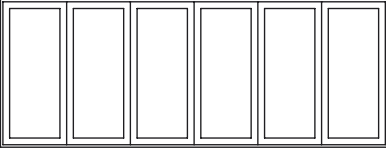


STUD OPENING SIZE FRAME SIZE		FRAME WIDTH + 60mm		
		FRAME WIDTH	CODE	CONFIGURATIONS
FRAME HEIGHT + 40 FRAME HEIGHT 2100mm	 ABBF-2 ATBF-2	1570	ABBF2116 ATBF2116	*2L 
		1810	ABBF2118 ATBF2118	*2R 
	 ABBF-3 ATBF-3	2350	ABBF2123 ATBF2123	3L  2L1R 
		2650	ABBF2126 ATBF2126	1L2R  3R 
	 ABBF-4 ATBF-4	3010	ABBF2130 ATBF2130	*4L  3L1R  *2L2R 
		3370	ABBF2134 ATBF2134	1L3R  *4R 
	 ABBF-5 ATBF-5	3730	ABBF2137 ATBF2137	5L  4L1R  3L2R 
		4210	ABBF2142 ATBF2142	2L3R  1L4R  5R 
	 ABBF-6 ATBF-6	4450	ABBF2144 ATBF2144	*6L  5L1R  *4L2R 
		5050	ABBF2150 ATBF2150	3L3R  *2L4R  1L5R  *6R 



STUD OPENING SIZE		FRAME WIDTH + 60mm		
FRAME HEIGHT + 40	FRAME SIZE	FRAME WIDTH	CODE	CONFIGURATIONS
FRAME HEIGHT 2100mm	<p>ABBF-7 ATBF-7</p>	5170	ABBF2152 ATBF2152	7L 6L1R 5L2R 4L3R 3L4R 2L5R 1L6R 7R
		5770	ABBF2158 ATBF2158	8L 7L1R 6L2R 5L3R 4L4R 3L5R 2L6R 1L7R 8R
	<p>ABBF-8 ATBF-8</p>	5890	ABBF2159 ATBF2159	

Wideline's policy of continued improvement may result in changes of specification without notice.
Windows and doors illustrated as viewed from outside.

- Door configurations with even numbers of panels on each side (examples shown above with *) do not have an access door, hence have internal access only.
- Stud opening size shown applies to frames fitted with reveals for brick veneer applications.
- Bi-fold doors rate to a maximum BAL-40.
- Maximum frame width: 6000mm
- Standard frame height: 2095mm
- Maximum frame height: 2400mm
- Maximum leaf width: 900mm
- Maximum leaf weight: 80kg
- Outer frame section size: 100mm